



## SUSPENDED CEILING SYSTEMS - SHADOWLINE PLASTER

| Product                                      | Dimensions |         |          | Per carton |       |       |
|--|------------|---------|----------|------------|-------|-------|
|  | Length     | kg/pcs. | kg/lin.m | pcs.       | lin.m | kg    |
|  |            |         |          |            |       |       |
| SUPERTEC - Shadowline<br>Plaster Trim - 3600 | 3.6m       | 1.443   | 0.401    | 20         | 72    | 28.86 |



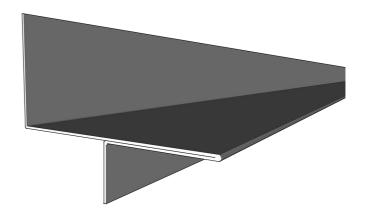

SHADOWLINE PLASTER TRIM 25 x 45 x 0.5mm

Due to the reproduction process the colours of the actual product may differ from what is shown above. Selection of products should be solely based on actual Supertec products. The details and technical information stated in this brochure and within other public material are based on calculated estimations. The responsibily falls onto the customer to ensure that this data is appropriate for the intended application of the product.


All system details comply with the current standards and are based on the use of Supertec products and system components. Supertec accepts no liability or responsibility for use of third party components, or for any variations to conditions stipulated in test data. Mixing of production batches is not recommended.

All technical data is subject to change without prior notice and is governed by Supertec Terms and Conditions of Sales. This catalogue supersedes all previous editions. Errors and omissions excepted. Printing errors excepted.




## WALL ANGLE

| Product  | Dimensions |         |          | Per carton |       |       |
|--|------------|---------|----------|------------|-------|-------|
|  | Length     | kg/pcs. | kg/lin.m | pcs.       | lin.m | kg    |
|  |            |         |          |            |       |       |
| SUPERTEC - Shadowline<br>Plaster Wall Angle - 3600 | 3.6m       | 1.213   | 0.337    | 20         | 72    | 24.26 |



SHADOWLINE PLASTER WALL ANGLE 13 x 21 x 21 x 0.5mm

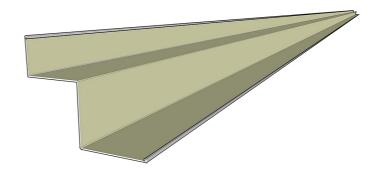

Due to the reproduction process the colours of the actual product may differ from what is shown above. Selection of products should be solely based on actual Supertec products. The details and technical information stated in this brochure and within other public material are based on calculated estimations. The responsibily falls onto the customer to ensure that this data is appropriate for the intended application of the product.

All system details comply with the current standards and are based on the use of Supertec products and system components. Supertec accepts no liability or responsibility for use of third party components, or for any variations to conditions stipulated in test data. Mixing of production batches is not recommended.

All technical data is subject to change without prior notice and is governed by Supertec Terms and Conditions of Sales. This catalogue supersedes all previous editions. Errors and omissions excepted. Printing errors excepted.